AussieLux D - Series
Interligent Smart Toilet

Auto Flush | Auto Sterilisation | Auto Foam

06 CUSTOMISABLE VERSIONS

INTERIOR
Keliss
SMART TECH

Smart
Nozzle Adjusting

Automatic Adjustment

54cm
Ergonomic design

Compared with the traditional 70cm toilet,
AussieLuxe 54cm length saves
at least 30% of space

Space
Saved
30%

Length **54**cm

Antibacterial

Comfortable Design to Fit Everyone

73mm

检测报告显示
抗菌率≥99.9%

Easier Maintenance Integrated Design

Intelligent integrated design,
no need a separate wall-mounted water tank

Just install the load-bearing bracket

INTERIOR KEViss SMART TECH

AussieLuxue Ultra ✓

Lower Cost
Built in water tank

Lower Renovation Cost
Smaller Wall Insertion Area

Better maintenance!
Integrated external unit

Traditional Toilet ✗

Seperate Water Tank Unit

Large Scale Wall Damage

If the water tank is damaged,
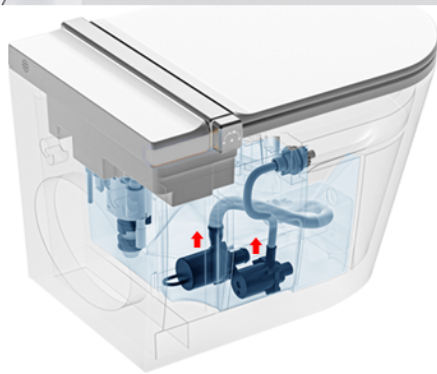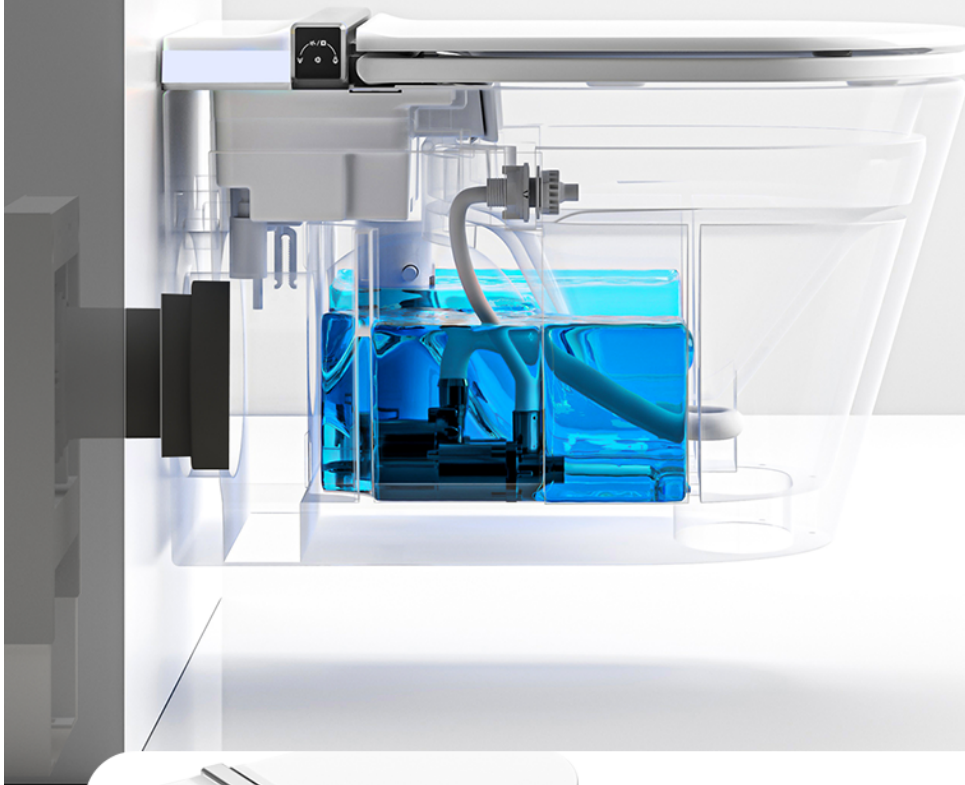maintenance is troublesome

Suspended
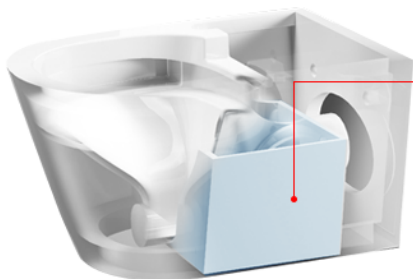**10**cm

High Weight Carrying Capacity

Built In Water Tank Booster Pump Power Flushing

Installed booster pump
ensures an effective power flush

Double pump booster
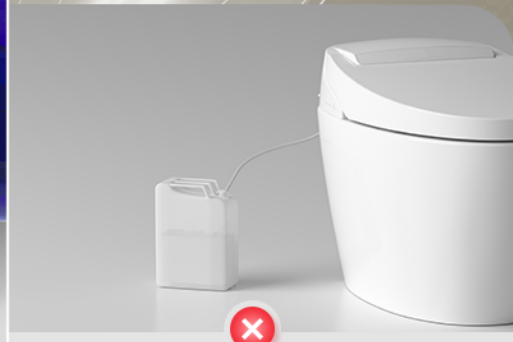
Two booster pumps
for powering up

In Built Water Tank

Uninterrupted Flushing

Built In Foaming System

EasyAddition of FoamingLiquid

INTERIOR
Keviss
SMART TECH

✓

Built In System

Stylish Design

❌

External System

Disorganised

✓

Built In System

Foaming Liquid

Bubble Guardian

Splash-proof, odor-proof, bacteria-proof

UV Sterilization Automatic start when lid is closed

After closing the lid,
it will be automatically disinfected
for 3 minutes
through high-efficiency, high-intensity,
long-life UV radiation

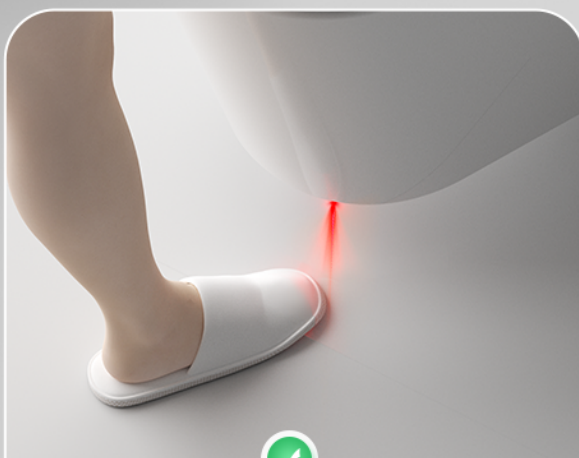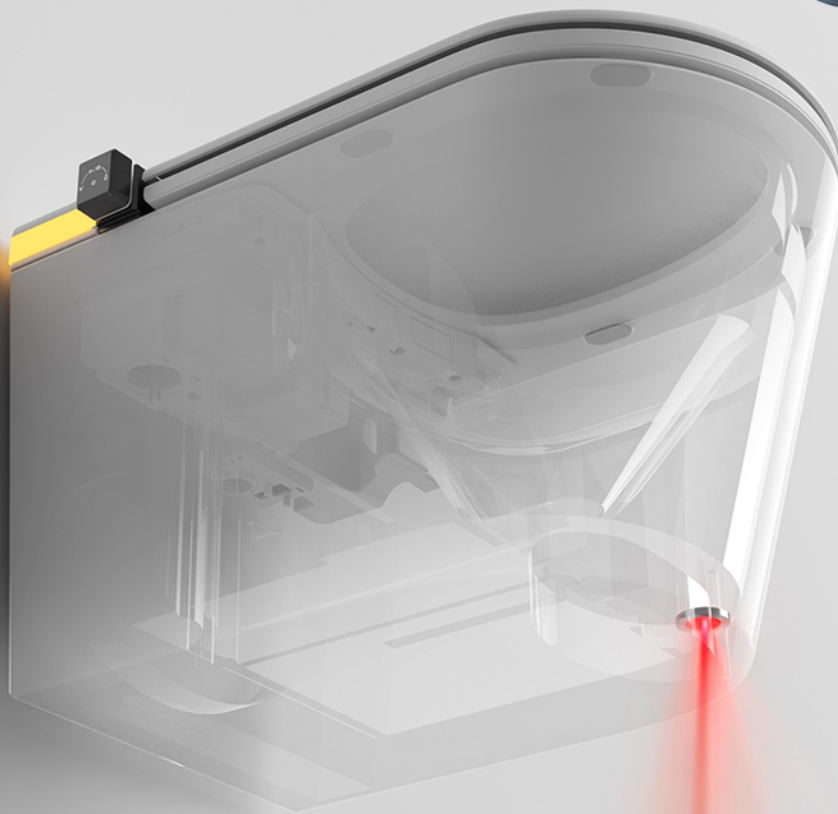Authoritative inspection report number: SZ20221658

Smart
Touch-Free Technology

Lid opens when you approach
Lid closes and flush once you leave

Laser Foot Sensor

The laser foot sensor emits
vertically downward
and can be triggered
by extending your foot.
No need to lift your foot,
and it is not affected by shoes.

INTERIOR
Keuss
SMART TECH

✓

Laser Foot Sensor

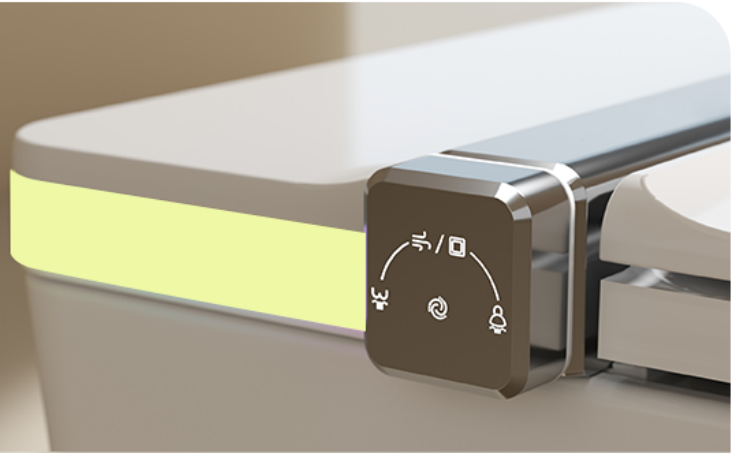Faster and
more accurate response

✗

Manual Sensor

Less Comfortable

Easier Controls

SIDE KNOB
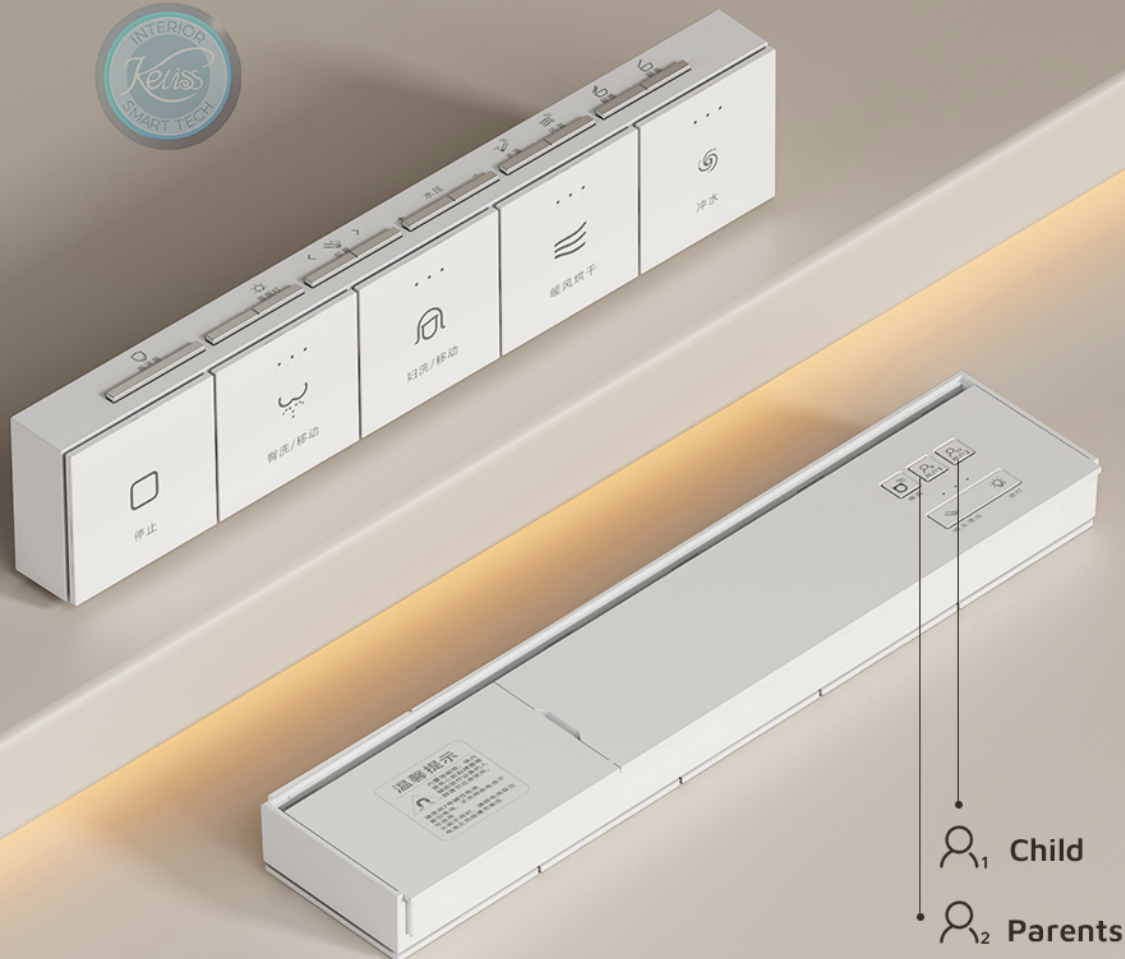
Clockwise:
Women's wash

Counterclockwise:
Rear Wash

When seated
Press once: stop
Press and hold: dry

Remote
Manual

Dual User Memory

The remote control has a built-in user memory function to record the user's toilet habits
and activate the user's toilet preferences with one click.

$\qquad$ $\mathcal{P}_1$ **Child**

$\qquad$ $\mathcal{P}_2$ **Parents**

$\mathcal{P}_1$ **User 1: Exclusive settings for children**
Seat temperature 39° | Warm air 40°
| Children's cleaning

$\mathcal{P}_2$ **User 2: Exclusive settings
for the elderly**
Seat temperature 35° | Warm air 35°
| Massage and cleaning

Colorful
Rainbow Design

Color Switching Options

Four Seasons Temperature Sensor

Automatic Adjstment
## As Per The Surrounding Temperature

Automatic Seat Temperature Adjustment

RT   ≈34℃   ≈37℃   ≈ 39℃

Automatic Water Temperature Adjustment

RT   ≈34℃   ≈37℃   ≈ 39℃

Automatic Wind Temperature Adjustment

RT   ≈45℃   ≈50℃   ≈ 55℃

Multiple Wash Patterns

Self Cleaning Nozzle

Rear Wash

01

Strong Flow

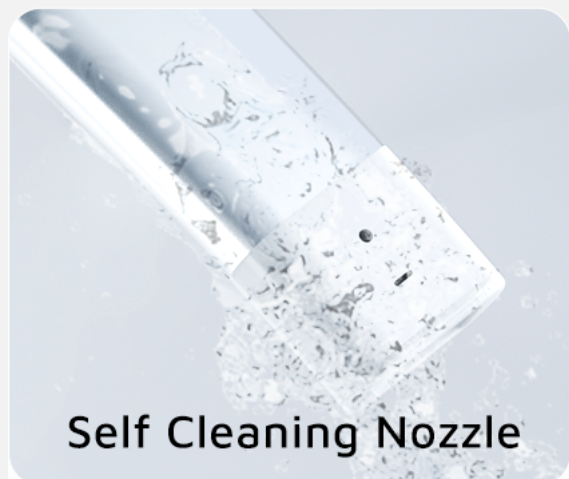**Female Wash**

02

Delicate and Gentle

Massage

03

Oscilating Nozzle Sprey

Self Cleaning Nozzle

04

Cleaning Befor
After Use

Multiple Protection Layers

Ensures Maximum Safety and Stability

Wind Overheat Protection

Water Overheat Protection

Seat Overheat Protection

Electric Insulation

Short Circuit Protection

Water and power outage protection

Exterior Water Proof

Seat ring waterproof protection

Luxury Addons

Auto Deodorisation   Starts As You Sit

LED Night Light   Mid Night Guidence

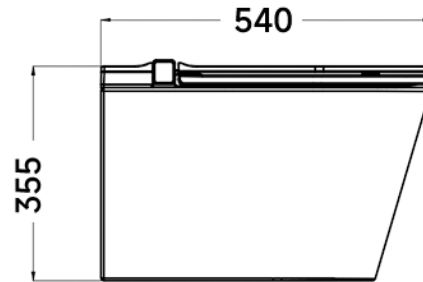**Robust LED Display**   Real Time Reporting
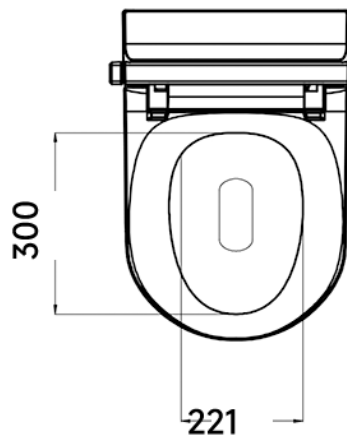
Dimensions
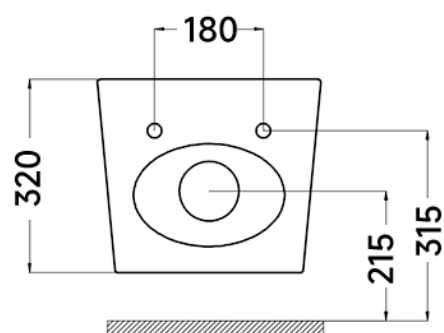
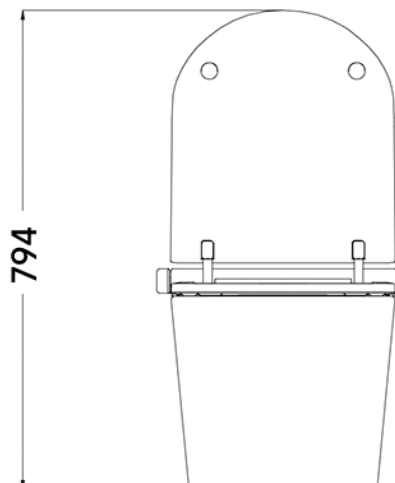Milimeters - mm
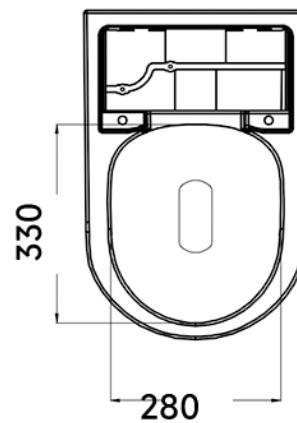
Front View
▼

400

355

Side View
▼

540

▼

Seat Ring Inner Dia

300

221

▼

Ceramic Body Dia

330

280

794

180

320

215

315

Dimensions

Milimeters - mm

Front View
▼

400
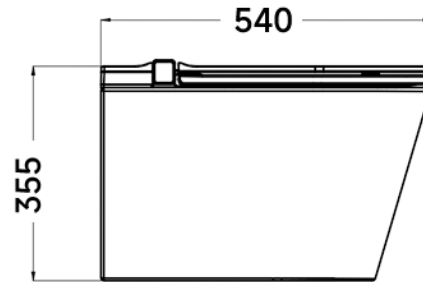
355

Side View
▼

540

▼

Seat Ring Inner Dia

300

221

▼

Ceramic Body Dia

330

280

794

180

320

215

315
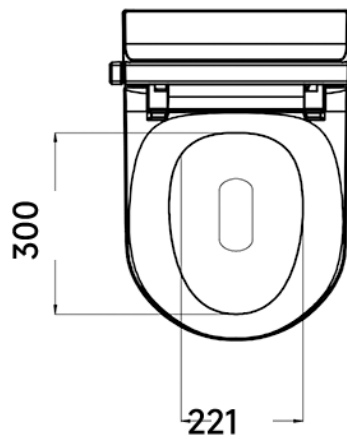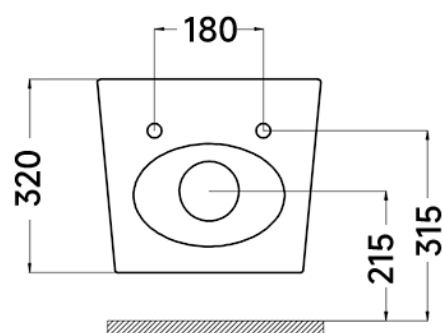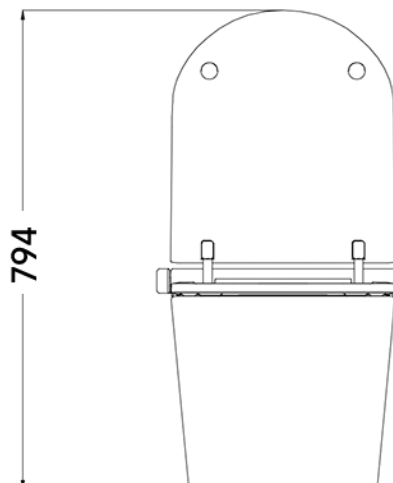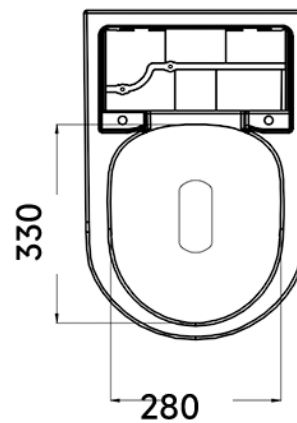
Bracket Dimensions

400
230
180
135
325-560

Unit:mm
110
40
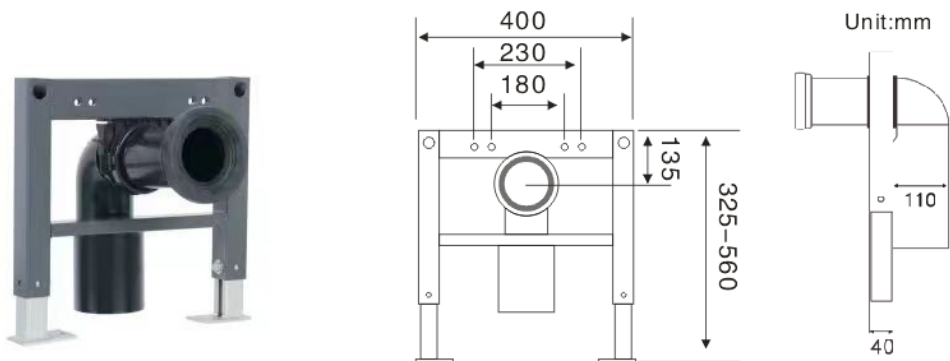
Note: Manual measurement may have slight deviations, please refer to the actual product.

Product Name	**Heating method**	**Power Cord**
Wall mounted intelligent toilet	Instant heating	1.5m 3-hole socket
Product size	**Theme Material**	**Drainage method**
540x400x355mm	ceramics	Wall Outlet
Seat width	**Flushing method**	**Rated voltage**
73mm	Jet siphon	AC220V/50Hz
Installation pit distance	**Water pressure limitation**	**Water supply method**
305/400/Other	No water pressure limitation	Direct connection

Function	2D / 3D	4D / 5D	6D
No water pressure limitation	✓	✓	✓
Intelligent patrol spray bar	✓	✓	✓
Intelligent voice control	—	—	✓
Splash proof foam shield	—	—	✓
Radar induction flip cover	—	✓	✓
Laser Foot Feel Flip Flip Loop	—	✓	✓
Automatic flushing lid closure	—	✓	✓
Four season warmth sensation	✓	✓	✓
UV sterilization	✓	✓	✓
Silver ion antibacterial seat ring	✓	✓	✓
Automatic flushing	✓	✓	✓
Laser foot senor flushing	✓	✓	✓
	✓	✓	✓

www.keliss.com
E-Mail : hello@keliss.com